
SOLENOID OPERATED VALVE
(Pilot Operated)
(Poppet 2-Way Normally-Closed Cartridge Style)

Ordering Code: **EP-10W-X-Y-Z-05**



UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

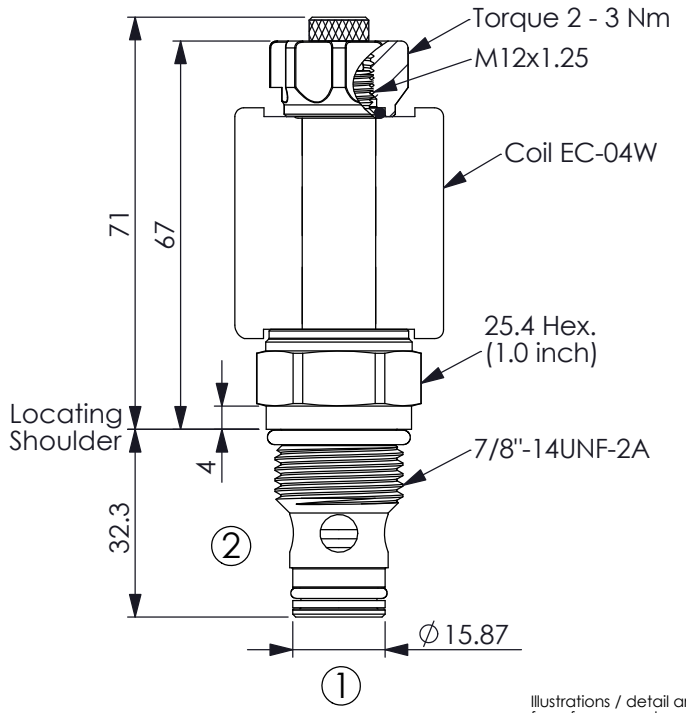

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	70	l/min
Cavity-Tooling:	10W-2	
Installation torque:	44 - 56	Nm
Weight:	0.16 (**Z**=N,M)	kg


Internal Leakage Approximately:
0.15 cc/minute
(3 drops/minute) max. at 350 bar


Hydraulic Fluid Viscosity、Cleanliness、Temperature Level:
Please refer WINNER technical information.
(T.101.101.E HYDRAULIC FLUID (A)VISCOSITY)
(T.101.102.E HYDRAULIC FLUID (B)CLEANLINESS)
(T.101.103.E HYDRAULIC FLUID (C)TEMPERATURE)

Minimum Voltage Required:
90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

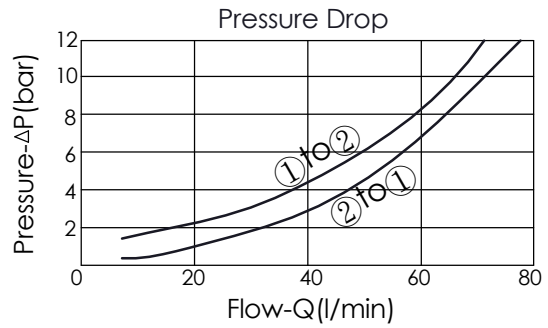


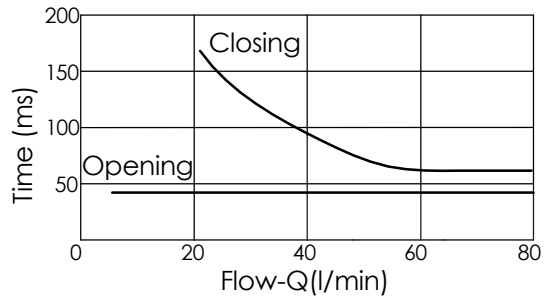

The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.

X	STRUCTURE	
2A	2 Ports、20 Watt. Coil ∅ 12.7 mm tube	

Y	OPERATION	
05	Normally-Closed Reverse Flow Energized	

Z	OPTIONS		
N	Non-adjustable		
M	Screw-out Knob Style	