

SOLENOID OPERATED VALVES
Continuous Duty Coils-ED 100%


Ordering Code: **EC-04W-X-Y-Z-B**

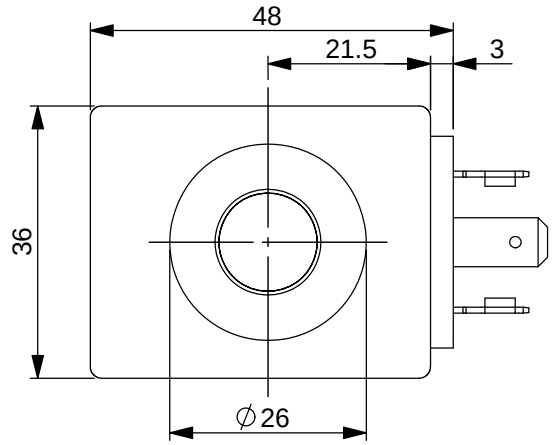

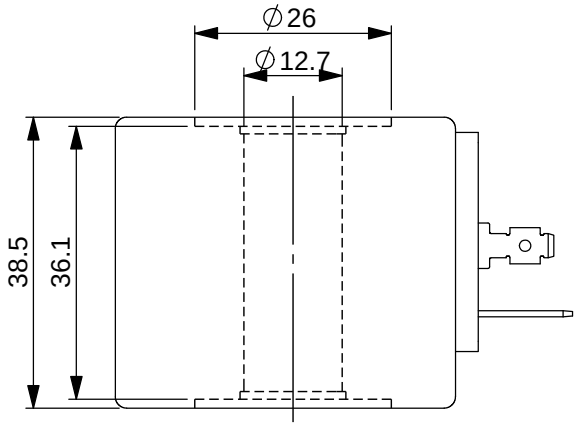

UNIT:mm

B CIRCUIT WITH VDR

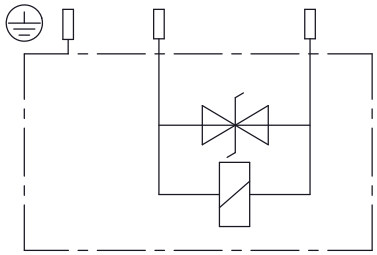

TECHNICAL DATA

Weight:	0.22 kg
HEAT INSULATION CLASS H:	
356°F	(180°C)
Ambient temperature range:	
-22+140°F	(-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

Recommend :
For proportional valve application.
Please use the coil without VDR

CE approved

X	Power (W)	
200	20 Watt.	

Y	Connections	
H	DIN43650-ISO4400	

Z	Voltage (V)	Resistance (Ω)	Current (A)		
	Nominal	20~25°C	Cold Coil	Hot Coil	
D	24V DC	28.6±7%	0.88	0.53	
H	48V DC	110±7%	0.45	0.28	