


Open spool end, B-side CI, PCI, ECS, ECH, SI

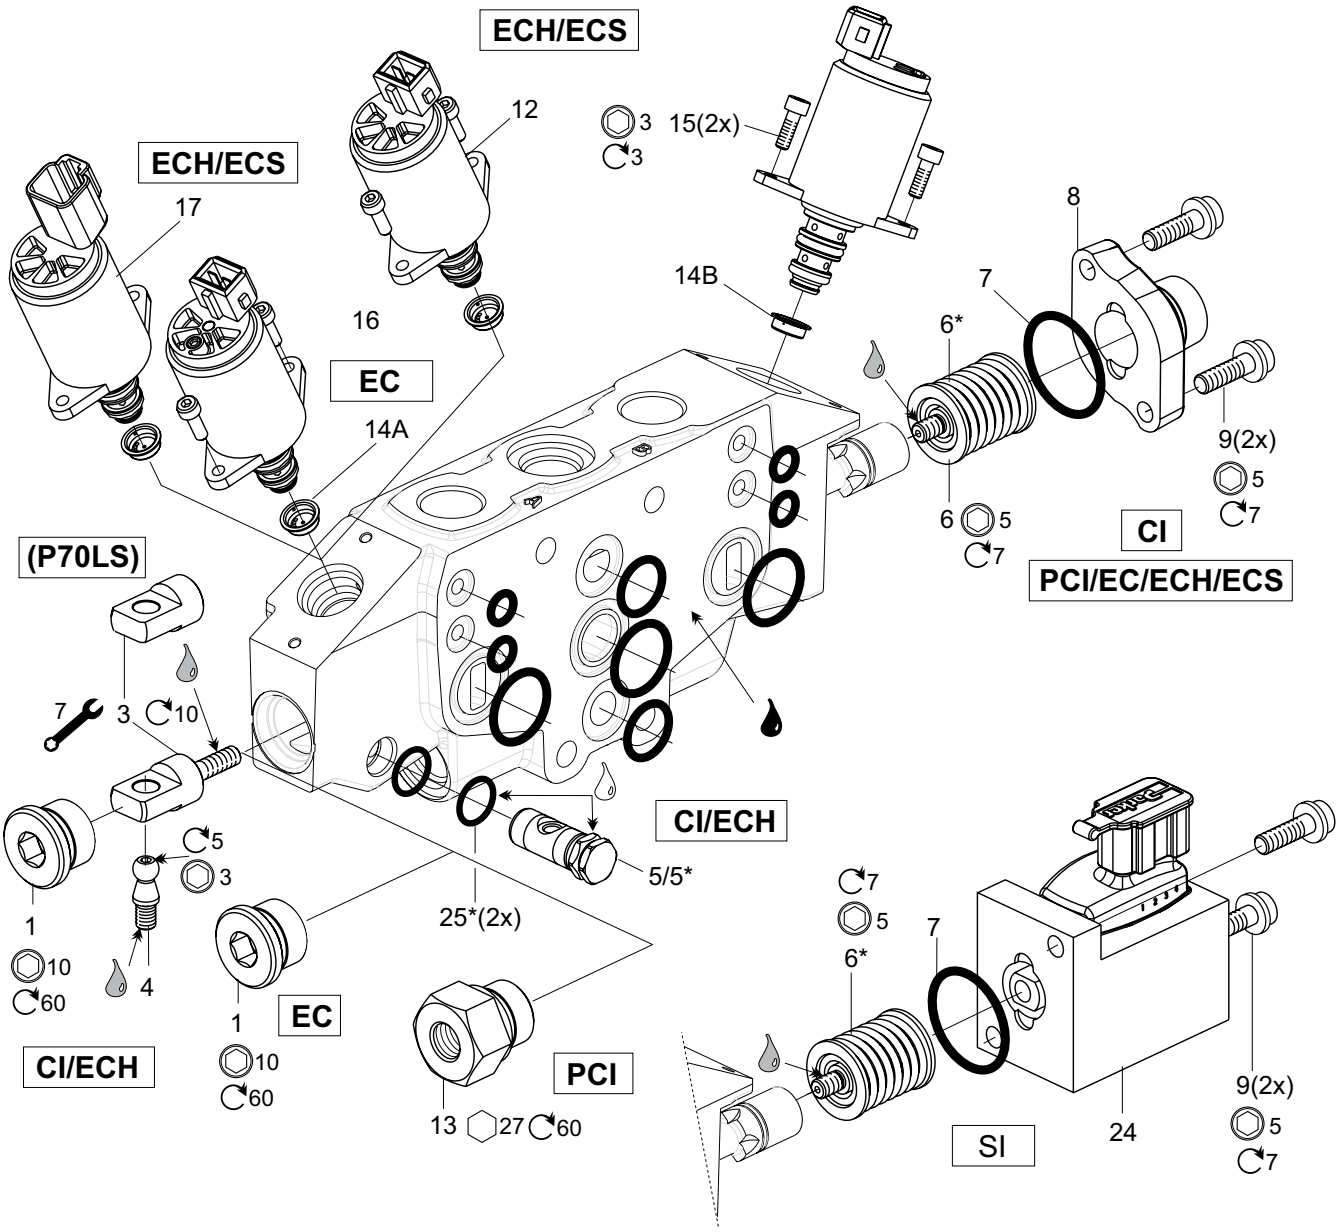

New style shaft CI/ECH (From serial number 0421xxxxxxx)



Earlier design of shaft CI/ECH (Until serial number 0420xxxxxxx)



See Customer Specification				
Code	**Pos**	**Part**	**Description**	**Remarks / Items**
CI/ECH	50	398000K072	Spool actuator CI/ECH A-side	1, 3, 4, 5 Valves until serial number 0420xxxxxxx
		6760336	Shaft CI/ECH with seals assembled	5
CI/ECH	50	398000K172	Spool actuator CI/ECH A-side	1, 3, 4, 5*, 25* Valves from serial no. 0421xxxxxxx
		398000K173	Shaft CI/ECH, no seals on	5*, 25* (O-rings mounted to grooves in cavity)
CI/ECH	50	398000K272	Cap kit for CI/ECH B-side, BSP	7, 8, 9
CI/ECH	50	398000K472	Cap kit for CI/ECH B-side, UNF	7, 8, 9
CI/ECH	50	398000K803	Seal kit	5, 7, 25*(2x) (Both old and new style)
CI	50	393000K342	Spring pack CI	6
SI+EC/ECH	52+50	398000K205	Actuator EC/ECH w. position sensing	6*, 7, 9, 24
SI	52	398000K861	SI housing	24
EC/ECH	50	6760048	Spring pack EC, ECH	6*
PCI	50	398000K372	Spool actuator PCI B-side, BSP	7, 8, 9
PCI		398000K108	Connection PCI, A-side, BSP	13
PCI	50	398000K672	Spool actuator PCI B-side, UNF	7, 8, 9
PCI		398000K308	Connection PCI, A-side, UNF	13
PCI/EC/ECH	50	6760048	Spring pack PCI, EC, ECH	6*
EC	50	398000K061	Plug EC, A-side	1
EC	50	398000K161	Cap kit EC, B-side	7, 8, 9
EC	50	393000M012	Solenoid valve PVC25, 12VDC	16 With air-bleed and manual override, AMP
EC	50	393000M024	Solenoid valve PVC25, 24VDC	16 With air-bleed and manual overrride, AMP
ECH/ECS	50	393000N012	Solenoid valve PVC25, 12 VDC	12 No air-bleed, no manual override, AMP
ECH/ECS	50	393000N024	Solenoid valve PVC25, 24 VDC	12 No air-bleed, no manual override, AMP
ECH/ECS	50	393000D012	Solenoid valve PVC25, 12 VDC	17 No air-bleed, no manual override, Deutsch
ECH/ECS	50	393000D024	Solenoid valve PVC25, 24 VDC	17 No air-bleed, no manual override, Deutsch
		393000K813	Seal kit for PVC25	
		393000K822	Connector kit AMP (for 1 PVC25)	
		393000K825	Connector kit AMP (for 10 PVC25)	
PVC		6760086	Pilot restriction ø1.2, mark: 5 dots	14, "0" - Low damping (5 pcs in kit)
PVC		6760083	Pilot restriction ø0.9, mark: 10 dots	14, "N" - Normal damping (Std. 5 pcs in kit)
PVC		6760080	Pilot restriction ø0.6, mark: 1 dot	14, "H" - Hard damping (5 pcs in kit)